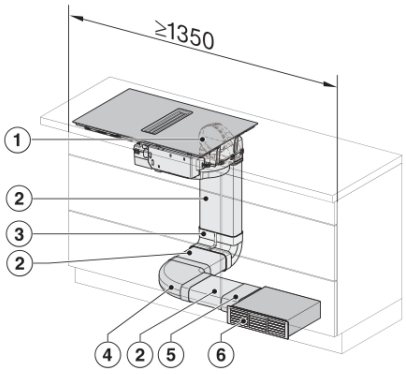

KMDA7272-1FL/FR, KMDA7473-1FL/FL MattFinish/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 4 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 1350 mm.

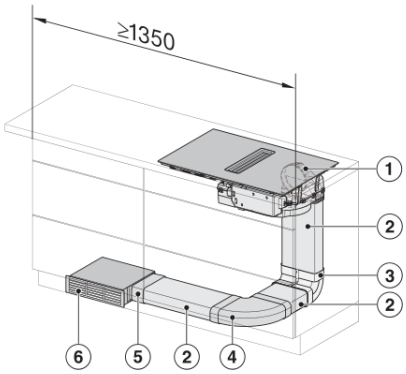

KMDA7272-1FL/FR, KMDA7473-1FL/FL MattFinish/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 5 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 1350 mm.

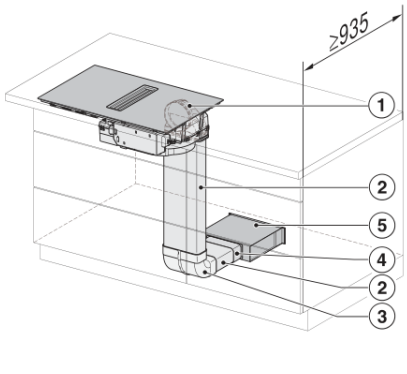

KMDA7272-1FL/FR, KMDA7473-1FL/FL MattFinish/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 6 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-V, 5) DUU 1500, , The minimum depth of the cabinet is 935 mm.

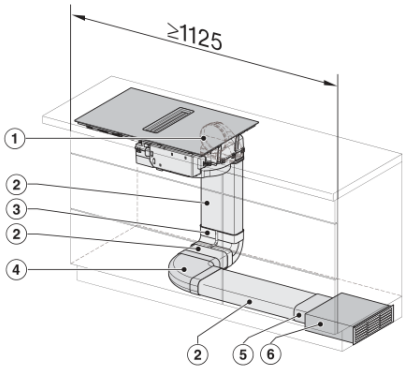

KMDA7272-1FL/FR, KMDA7473-1FL/FL MattFinish/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 13 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 1125 mm.

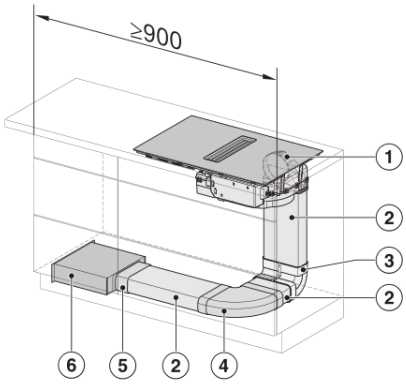

KMDA7272-1FL/FR, KMDA7473-1FL/FL MattFinish/FR, KMDA7272FL/FR, KMDA7473FL/FR – Installation variant 14 Circulating air

1) DFK-AK 90, 2) DFK-R 1000, 3) DFK-BV 90, 4) DFK-BH 90, 5) DFK-V, 6) DUU 1500, , The minimum width of the cabinet is 900 mm.

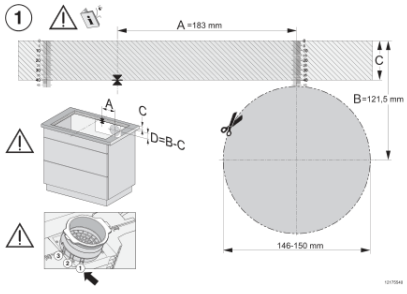
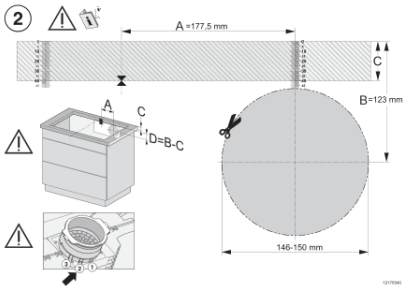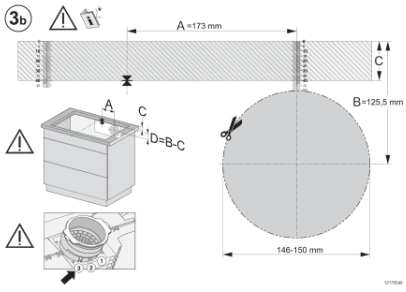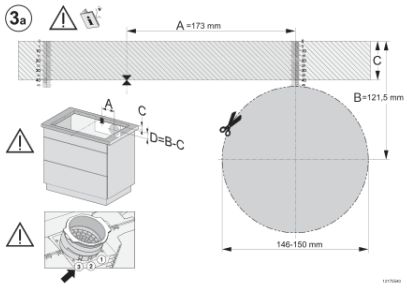
KMDA7272FL, KMDA7473FL – flush installation, drilling template, Installation depth 20 cm